


Two-Load Appliance Micro Module



Functions:

- ◆ Control Appliance or Fluorescent lamp Turn ON / Turn OFF.
- ◆ "Codes Set Electronically" is very easy and convenient in only 6 seconds.
- ◆ Long-distance control through computer, telephone.
- ◆ Respond to "All Units OFF" command; "All Lights ON" can be set for Fluorescent lamp.
- ◆ Low signal driver (25mV).
- ◆ Compatible with any X10 controller.
- ◆ Can be connected with Momentary and Normal Switch.

Technical Specs:

- Rated Voltage: 230VAC±10%, 50Hz
- Lamp 1/2 Loads: ≤800W x 2 for each
- Static State Wastage: <1W
- Suitable Temperature -10~50°C

Installation:

- Shut off power.
- Connection line according to label on the module.
 - ◆ Module "L" connects with Line.
 - ◆ Module "N" connects with Neutral.
 - ◆ "1", "2" connects with Load.
 - ◆ Black / Blue / Red lines are connected to your old switches.

Connection Figure

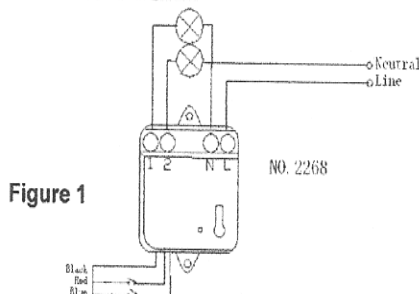


Figure 1

"All Lights On"/"All Units Off" Respond:

Press and hold "Setting" button for 5 seconds, indicator light flickers once, controlled appliance or light Turn ON means entering "Setting" state. If your load is light, **Use your Mini-controller transmits "All Lights On" signal**, the Micro Module will respond to "All lights On" command; while if the load is appliance, **you should transmit "All Units Off" signal**, the Micro Module will not respond to "All lights On" command; Then you **transmit address signal**, at this time the indicator light OFF, and controlled load OFF, you have done it!

Note: For example: you want setup the 2 addresses are A01 and A02, if they are both lights, after entering Setup status, sending signal sequence should be "All Lights On", "A01", "All Lights On", and then "A02", Thus the 2 load addresses will be A01/A02, and they both responds "All Lights On"; While if only "All Lights On", "A01", "A02", here only A01 responds "All Lights On" commands. A02 can not respond.

***Without any operation in 6 seconds during setting, it will exit "Address codes electronically setting state".**

Setting Address Method:

Single Address Settings:

- Press and hold the setup button for 5 seconds & the light indicator will flicker once.
- Release the setup button and the light indicator and the load will remain 'On' to indicate that you are now in the 'program mode'.
- Use any X10 controller and transmit the X10 address to the micro module e.g. send "A: ON".
- Both the lamp indicator and the Lamp will now turn OFF to indicate that the address has been set.

Usage:

With convenient connection method, installing #2268E on any lamp, it can respond "ON / OFF, All Units OFF" commands come from any X10 controllers (even controllers can be compatible with X10 signal). If you want to control lamps in your home from your office or any other places in the world, additionally a Voice-Telephone Controller **SC2800 or SC8000** is ok.

Note:

We suggest our customer when use #2268E to control Fluorescent lamps and appliances, **#2264, 2263** is necessary on the lamps.